

# MEGAVOLT BATTERY

by Power & Energy USA

Distributed by:

# MEGAVOLT BATTERY

MAXIMUM PERFORMANCE



[www.megavoltbattery.com](http://www.megavoltbattery.com)

We attempt to ensure the correctness of the product descriptions contained within this material when it is originally prepared. It is our policy to continuously improve and develop our products. We reserve the right to change designs and specifications at any time without notice or obligation.

## BATTERY CATALOG



AUTOMOTIVE



COMMERCIAL



GOLF CARTS



LAWN & GARDEN



MARINE & RV



ELECTRIC CARS



INDUSTRIAL



TELECOM & UPS



SOLAR



VRLA



# MEGAVOLT

★ ★ BATTERY ★ ★



## MAXIMUM PERFORMANCE

The superior performance of MEGAVOLT BATTERY makes it one of the most efficient in the market.



## MAINTENANCE FREE

Premium alloys such as Silver Calcium & Tin allow the closed system to be self-sustaining preventing water loss and therefore longer battery life.



## LONG LIFE

MEGAVOLT BATTERIES are made with reinforced grids and thicker plates which provide more reliable power to thousands of customers around the world.



## PFX TECHNOLOGY

PFX Technology delivers maximum performance in multiple applications, improving energy conductance, heat resistance, cyclability and increasing the overall life of the battery.



## RECYCLABLE

MEGAVOLT BATTERY has been contributing to a healthier environment for many years. Our processes are in compliance with environmental regulations and protocols.



## MADE IN THE USA


MEGAVOLT BATTERY is proudly made in USA and built with the highest quality standards.

\*Some batteries are manufactured outside of the USA



MEGAVOLT BATTERY is manufactured by state of the art robotic facilities that meet the highest standards for quality and environmental best practices.



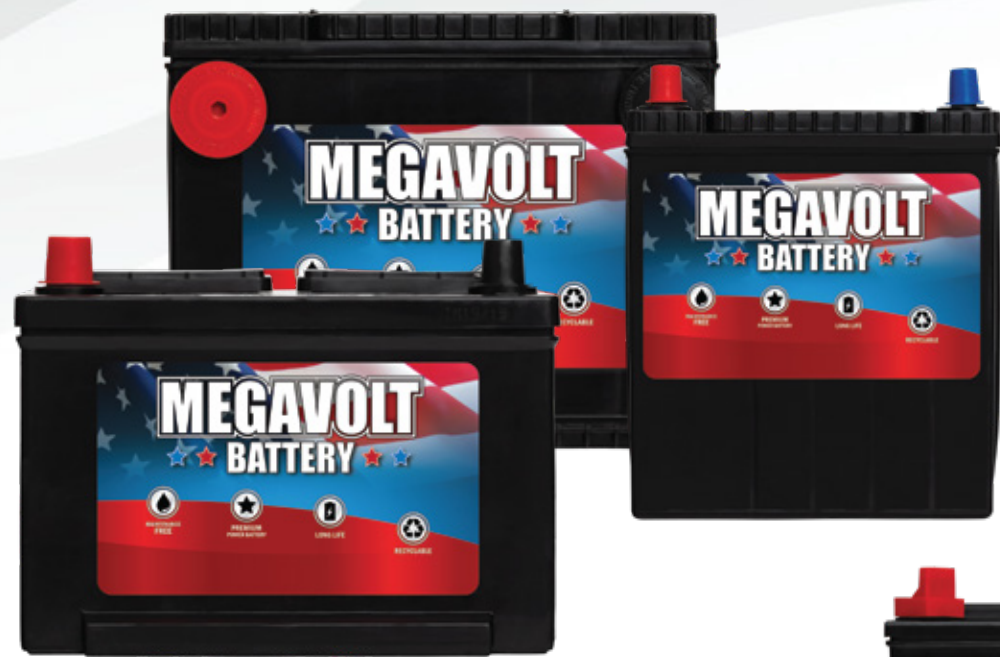

***AUTOMOTIVE***



***LAWN & GARDEN***



***COMMERCIAL***



***AGM***



***GOLF CARTS***



***RV & MARINE***

***MAXIMUM PERFORMANCE***





# AUTOMOTIVE BATTERIES



# AUTOMOTIVE BATTERIES



BCI#	DIN	Part No	Layout	CCA	CA	CA 27C	AMP Reserve		Weight	DIMENSIONS			Export
							HOUR @20H	Cap @ 25 AMPS		MM L	MM W	MM H	Pallet Qty
<b>12 VOLT AUTOMOTIVE BATTERIES - MAINTENANCE FREE</b>													
24		24-50-400	+ -	400	475	585	45	70	33	260	170	225	120
24		24-60-520	+ -	520	620	760	60	100	35	260	170	225	120
24		24-65-600	+ -	600	750	920	70	110	37	260	170	225	96
24		24-70-700	+ -	700	875	1080	80	120	40	260	170	225	96
24R		24R-50-400	- +	400	475	585	45	70	33	260	170	225	120
24R		24R-60-520	- +	520	620	760	60	100	35	260	170	225	120
24R		24R-65-600	- +	600	750	920	70	110	37	260	170	225	96
24R		24R-70-700	- +	700	875	1080	80	120	40	260	170	225	96
		124R-70-700	- +	700	875	1080	80	120	40	260	170	225	96
25		25-60-525	+ -	525	650	800	60	90	32	230	170	222	130
26		26-60-500	+ -	500	625	770	50	80	28	206	171	208	150
26R		26R-60-500	- +	500	625	770	50	80	28	206	171	208	150
27		27-70-710	+ -	710	880	1085	85	130	44	305	173	225	105
27R		27R-70-710	- +	710	880	1085	85	130	44	305	173	225	105
34		34-60-650	+ -	650	800	985	70	120	38	260	173	200	120
34R		34R-60-650	- +	650	800	985	70	120	38	260	173	200	120
35		35-50-450	- +	450	540	665	50	80	32	230	173	225	120
35		35-60-575	- +	575	700	860	60	100	35	230	173	225	120
40R		40R-60-600	- +	600	720	885	70	115	35	278	175	175	105
41	T6/LBN3	41-60-600	- +	600	720	885	70	115	35	278	175	175	105
42	T5/LBN2	42-50-400	- +	400	500	615	40	60	26	242	175	175	120
42	T5/LB2	42-70-500	- +	500	600	740	50	80	28	242	175	175	120
42	T5/LB2	42-80-575	- +	575	675	830	60	100	30	242	175	175	120
42 INV	T5/LBN2 INV	42R-50-400	+ -	400	500	615	40	60	26	242	175	175	120
42 INV	T5/LBN2 INV	42R-70-500	+ -	500	600	740	50	80	28	242	175	175	120
47	H5/L2	47-70-600	- +	600	715	880	62	110	33	242	175	190	120
48	H6/L3	48-50-600	- +	600	720	885	66	115	38	277	175	190	105
48	H6/L3	48-60-700	- +	700	875	1080	74	120	40	277	175	190	105
49	H8/L8	49-50-730	- +	730	900	1110	80	140	46	353	175	190	72
49	H8/L8	49-60-850	- +	850	1000	1230	88	160	52	353	175	190	72
51		51-50-450	+ -	450	555	685	45	70	27	236	127	223	144
51		51-60-500	+ -	500	525	645	55	85	29	236	127	223	144
51R		51R-50-450	- +	450	555	685	45	70	27	236	127	223	144
51R		51R-60-500	- +	500	525	645	55	85	29	236	127	223	144
58		58-72-550	+ -	550	685	845	55	90	31	235	181	178	130
58R		58R-72-550	- +	550	685	845	55	90	29	235	181	178	130
59		59-60-575	+ -	575	700	860	58	100	34	235	190	196	100
65		65-50-640	+ -	640	800	985	70	115	40	286	190	192	90
65		65-60-700	+ -	700	875	1080	75	130	42	286	190	192	90
65		65-72-800	+ -	800	975	1200	80	140	43	286	190	192	90
75		75-60-540	+ -	540	650	800	50	90	33	230	179	181	140
78		78-72-775	+ -	775	950	1170	70	130	40	260	179	181	120



**AUTOMOTIVE & GENERAL USE**



**AGM 12 VOLT SEALED BATTERIES**



**12 VOLT DUAL TERMINAL / UNIVERSAL BATTERIES - MAINTENANCE FREE**



**12 VOLT JIS - MAINTENANCE FREE BATTERIES**



**AUTOMOTIVE & GENERAL USE**



BCI#	DIN	Part No	Layout	CCA	CA	CA 27C	AMP Reserve		Weight	DIMENSIONS			Export Pallet Qty
							@20H	AMPS		MM L	MM W	MM H	
<b>12 VOLT AUTOMOTIVE BATTERIES - MAINTENANCE FREE</b>													
86		86-60-570	+ -	575	685	845	60	105	32	230	173	200	120
86	T5/LBN2	90-70-500	- +	500	600	740	50	80	28	242	175	175	120
91	T6/LBN3	91-60-600	- +	600	720	885	70	115	35	278	175	175	105
94R	H7-NL4	94R-60-750	- +	750	900	1110	80	140	44	315	175	190	105
96R	T5/LBN2	96R-80-575	- +	575	675	830	60	100	30	242	175	175	120
99R	T4-LNB1	99R-50-420	- +	420	520	640	45	63	25	207	175	175	150
151R		151R-50-350	- +	350	420	520	40	60	23	187	127	227	140

<b>AGM 12 VOLT SEALED BATTERIES</b>													
47	H5/L2	AGM47-60-700	- +	700	975	1200	60	130	38	242	175	190	96
48	H6/L3	AGM48-70-800	- +	800	975	1200	70	130	45	277	175	190	96
49	H8/L8	AGM49-80-900	- +	900	1050	1290	95	170	58	353	175	190	72
94R	H7/LN4	AGM94R-70-800	- +	800	975	1200	80	160	50	315	175	190	72

BCI#	Part No	Layout	CCA	CA	CA 27C	AMP Reserve		Weight	DIMENSIONS			Export Pallet Qty	
						@20H	AMPS		MM L	MM W	MM H		
<b>12 VOLT DUAL TERMINAL / UNIVERSAL BATTERIES - MAINTENANCE FREE</b>													
75DT	2575-60-540	+ -	540	650	800	49	90	33	230	179	200	120	
78DT	3478-60-750	+ -	775	850	1045	70	130	40	260	179	200	120	

JIS#	Part No	Layout	CCA	CA	CA 27C	AMP Reserve		Weight	DIMENSIONS			Export Pallet Qty	
						@20H	AMPS		MM L	MM W	MM H		
<b>12 VOLT JIS - MAINTENANCE FREE BATTERIES</b>													
40B20R	NS40-50-350	+ -	350	425	525	40	60	23	187	127	227	192	
40B20L	NS40L-50-350	- +	350	425	525	40	60	23	187	127	227	192	
60B24R	NS60-60-500	+ -	500	600	740	45	70	29	236	127	223	144	
60B24L	NS60L-60-500	- +	500	600	740	45	70	29	236	127	223	144	
50B24R	NS60-50-450	+ -	450	555	685	55	85	27	236	127	223	144	
50B24L	NS60L-50-450	- +	450	555	685	55	85	27	236	127	223	144	
50D26R	N50Z-50-400	+ -	400	475	585	45	70	33	260	170	225	120	
65D26R	N50Z-60-520	+ -	520	620	760	60	100	35	260	170	225	120	
75D26R	75D26R-65-600	+ -	600	750	920	70	110	37	260	170	225	120	
90D26R	NX110-70-700	- +	700	875	1,080	80	120	40	260	170	225	96	
50D26L	N50ZL-50-400	- +	400	475	585	45	70	33	260	170	225	120	
65D26L	N50ZL-60-520	- +	520	620	760	60	100	35	260	170	225	120	
75D26L	75D26L-65-600	+ -	600	750	920	70	110	37	260	170	225	120	
90D26L	NX110L-70-700	- +	700	875	1,080	80	120	40	260	170	225	96	
55D23R	55D23R-60-520	+ -	525	650	800	60	90	32	230	170	222	130	
50D23L	50D23L-50-450	- +	450	540	665	50	80	32	230	173	225	120	
55D23L	55D23L-60-575	- +	575	700	860	60	100	35	230	173	225	120	
95D31R	NX120-60-710	+ -	710	880	1,085	85	130	44	305	173	225	105	
95D31L	NX120L-60-710	- +	710	880	1,085	85	130	44	305	173	225	105	

## COMMERCIAL & INDUSTRIAL BATTERIES



HD 31P

HD 31S

8D



4D

4DLT

## GOLF CART INVERTER BATTERIES



GC6

GC8

GC12

## MARINE BATTERIES



M24

M27

31 MDC

## LAWN & GARDEN BATTERIES



U1RS

U1LS

## COMMERCIAL & INDUSTRIAL BATTERIES



BCI#	JIS#	Part No	Layout	CCA	CA	CA 27C	AMP Reserve		Approx. Weight	DIMENSIONS			Export Pallet Qty
							HOUR @20H	Cap @ 25 AMPS		MM L	MM W	MM H	
<b>12 VOLT COMMERCIAL BATTERIES - MAINTENANCE FREE</b>													
31P		HD31P-20-650	+ -	650	775	955	80	145	48	328	171	237	72
31P		HD31P-30-725	+ -	725	900	1,110	90	170	52	328	171	237	72
31P		HD31P-40-800	+ -	800	1000	1,230	95	180	55	328	171	237	72
31P		HD31P-50-950	+ -	950	1100	1,355	100	195	58	328	171	237	72
31S		HD31S-20-650	+ -	650	775	955	80	145	48	328	171	237	72
31S		HD31S-30-725	+ -	725	900	1,110	90	170	52	328	171	237	72
31S		HD31S-40-800	+ -	800	1000	1,230	95	180	55	328	171	237	72
31S		HD31S-50-950	+ -	950	1100	1,355	100	195	58	328	171	237	72
<b>12 VOLT COMMERCIAL BATTERIES</b>													
4D	N-150	4DHD-40-850	- +	850	1000	1,230	130	235	83	500	211	254	45
4D	N-170	4DHD-45-1100	- +	1100	1300	1,600	150	320	90	500	211	254	45
4DLT	N-180	4DLT-50-820	+ -	820	970	1,195	125	250	74	505	208	209	30
8D	N-200	8DHD-40-1200	- +	1200	1450	1,785	190	305	108	527	277	255	32
8D	N-220	8DHD-50-1300	- +	1300	1550	1,910	220	350	112	527	277	255	32

## GOLF CART INVERTER BATTERIES



BCI#	Volts	Part No	Layout	AMP HOUR @20H	RESERVE CAPACITY		Approx. Weight	DIMENSIONS			Export Pallet Qty
					@ 75 AMPS	@ 25 AMPS		MM L	MM W	MM H	
GC6	6	GC6-1100	- +	205	100	390	57	260	181	284	72
GC6	6	GC6-1200	- +	220	110	410	60	260	181	284	72
GC6	6	GC6-1300	- +	235	120	460	65	260	181	284	72
GC8	8	GC8-1200	+ -	170	122	305	63	260	181	284	72
GC12	12	GC12-1200	+ -	150	70	280	83	327	183	277	48

## MARINE BATTERIES



BCI#	Part No	Layout	CCA	MCA	CA 27C	AMP Reserve		Approx. Weight	DIMENSIONS			Export Pallet Qty
						HOUR @20H	Cap @ 25 Amps		MM L	MM W	MM H	
<b>12 VOLT STARTING MARINE BATTERIES - MAINTENANCE FREE</b>												
24MS	M24-40-525	+ -	525	650	800		90	37	258	170	231	120
24MS	M24-50-800	+ -	800	1000	1230		140	41	258	170	231	96
27MS	M27-50-800	+ -	800	1000	1230		180	54	320	170	235	72
<b>12 VOLT MARINE - RV / DEEP CYCLE BATTERIES - LOW MAINTENANCE</b>												
24MDC	24DC-50-525	+ -	525	655	805	80	120	40	272	168	235	90
27MDC	27DC-50-700	+ -	700	860	1,060	105	180	50	320	168	235	72
31MDC	31DC-50-850	+ -	885	1100	1,355	115	225	59	328	171	237	72

## LAWN & GARDEN BATTERIES



BCI#	Part No	Layout	CCA	CA	CA 27C	AMP Reserve		Approx. Weight	DIMENSIONS			Export Pallet Qty
						HOUR @20H	Cap @ 25 AMPS		MM L	MM W	MM H	
<b>12 VOLT LAWN AND GARDEN BATTERIES - SILVER / CALCIUM MAINTENANCE FREE</b>												
U1L	U1LS-30-300	+ -	300	375	460	22	35	17	197	130	186	200
U1R	U1RS-30-300	- +	300	375	460	22	35	17	197	130	186	200